

Description

The TWSL314 series Photocoupler is ideally suited for driving power IGBTs and MOSFETs used in motor control inverter applications and inverters in power supply system. It contains an AlGaAs LED optically coupled to an integrated circuit with a power output stage.

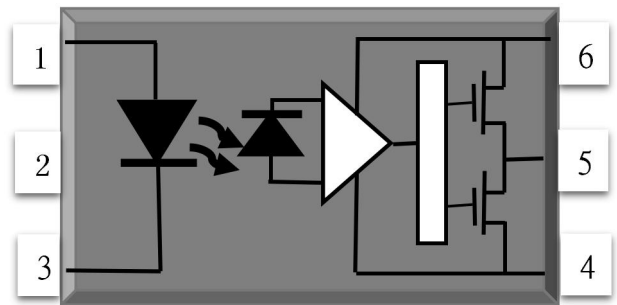
Features

- 1.5 A maximum peak output current
- 0.8 A minimum peak output current
- Rail-to-rail output voltage
- 110 ns maximum propagation delay
- Under Voltage Lock-Out protection (UVLO) with hysteresis
- Wide operating range: 10 to 30 Volts (V_{CC})
- Guaranteed performance over temperature $-40^{\circ}\text{C} \sim +110^{\circ}\text{C}$.
- MSL class 1

Applications

- Isolated IGBT/Power MOSFET gate drive
- Industrial Inverter
- AC brushless and DC motor drives
- Induction Heating

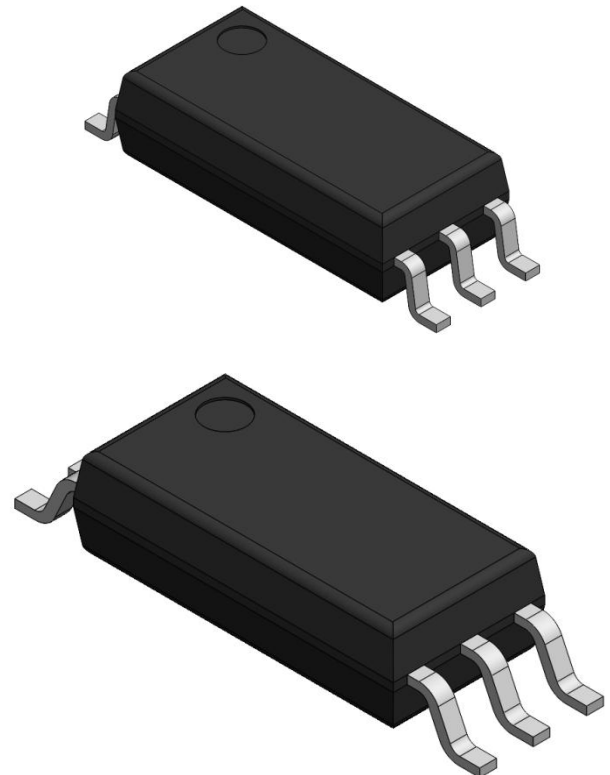
SCHEMATIC



PIN DEFINITION

1.Anode	6.VCC
2.None	5.VO
3.Cathode	4.VSS

PACKAGE OUTLINE



LSOP6, DC Input, 0.8A, Gate Driver Photo Coupler**TRUTH TABLE**

LED	$V_{CC}-V_{SS}$ (Turn-ON, +ve going)	$V_{CC}-V_{SS}$ (Turn-OFF, -ve going)	V_o
Off	0V to 30V	0V to 30V	Low
On	0V to 6.9V	0V to 5.9V	Low
On	6.9V to 8.7V	5.9V to 7.5V	Transition
On	8.7V to 30V	7.5V to 30V	High

Note: A 0.1 μ F bypass capacitor must be connected between Pin 4 and 6.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	Min	Max	UNIT	Note
Storage Temperature	T_{stg}	-55	125	$^{\circ}\text{C}$	-
Operating Temperature	T_{opr}	-40	100	$^{\circ}\text{C}$	-
Output IC Junction Temperature	T_J	-	125	$^{\circ}\text{C}$	-
Total Output Supply Voltage	$(V_{CC}-V_{SS})$	0	35	V	-
Average Forward Input Current	I_F	-	20	mA	-
Reverse Input Voltage	V_R	-	5	V	-
“High” Peak Output Current	$I_{OH(PEAK)}$	0.8	1.5	A	1
“Low” Peak Output Current	$I_{OL(PEAK)}$	0.8	1.5	A	1
Output Voltage	$V_{O(PEAK)}$	-0.5	V_{CC}	V	-
Power Dissipation	P_I	-	45	mW	-
Output IC Power Dissipation	P_O	-	250	mW	-
Lead Solder Temperature	T_{sol}	-	260	$^{\circ}\text{C}$	-

Note: Ambient temperature = 25 $^{\circ}\text{C}$, unless otherwise specified. Stresses exceeding the absolute maximum ratings can cause permanent damage to the device. Exposure to absolute maximum ratings for long periods of time can adversely affect reliability.

RECOMMENDED OPERATION CONDITIONS

PARAMETER	SYMBOL	MIN.	MAX.	UNIT
Operating Temperature	T_A	-40	110	$^{\circ}\text{C}$
Supply Voltage	V_{CC}	10	30	V
Input Current (ON)	$I_{F(ON)}$	7	16	mA
Input Voltage (OFF)	$V_{F(OFF)}$	-3.0	0.8	V

ELECTRICAL OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
INPUT CHARACTERISTICS							
Forward Voltage	V_F	-	1.38	1.8	V	$I_F = 10\text{ mA}$	-
Reverse Current	I_R	-	-	10	μA	$V_R = 5\text{V}$	-
Input Threshold Current (Low to High)	I_{FLH}	-	0.6	2	mA	$V_O > 5\text{V}, I_O = 0\text{A}$	-
Input Threshold Voltage (High to Low)	V_{FHL}	0.8	-	-	V	$V_{CC} = 30\text{ V}, V_O < 5\text{V}$	-
Input Capacitance	C_{IN}	-	60	-	pF	$V_F = 0, f = 1\text{MHz}$	-
OUTPUT CHARACTERISTICS							
High Level Supply Current	I_{CCH}	-	1.50	3	mA	$I_F = 10\text{ mA}, V_{CC} = 30\text{ V},$ $V_O = \text{Open}, R_g = 30\Omega, C_g = 3\text{ nF}$	
Low Level Supply Current	I_{CCL}	-	1.50	3	mA	$I_F = 0\text{ mA}, V_{CC} = 30\text{ V},$ $V_O = \text{Open}, R_g = 30\Omega, C_g = 3\text{ nF}$	
High Level Output Voltage	V_{OH}	29.4	29.69	-	V	$I_F = 10\text{ mA}, I_O = -100\text{ mA}$	2,3
Low Level Output Voltage	V_{OL}	-	0.17	0.34	V	$I_F = 0\text{ mA}, I_O = 100\text{ mA}$	
High Level Output Current	I_{OH}	-	-	-0.8	A	$I_F = 10\text{ mA}, V_{CC} = 30\text{V}$ $V_O = V_{CC} - 4$	1
Low Level Output Current	I_{OL}	0.8	-	-	A	$I_F = 0\text{ mA}, V_{CC} = 30\text{V}$ $V_O = V_{SS} + 4$	1
Under Voltage Lockout Threshold	VUVLO+	6.9	7.8	8.7	V	$V_O > 5\text{V}, I_F = 10\text{ mA}$	
	VUVLO-	5.9	6.9	7.5	V	$V_O < 5\text{V}, I_F = 10\text{ mA}$	

All Typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{SS} = 30\text{ V}$, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Maximum pulse width = 10 μs .

Note 2: In this test V_{OH} is measured with a dc load current. When driving capacitive loads, V_{OH} will approach V_{CC} as I_{OH} approaches zero amps.

Note 3: Maximum pulse width = 1 ms.

SWITCHING SPECIFICATION

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION	NOTE
SWITCHING CHARACTERISTICS							
Propagation Delay Time to Output Low Level	t_{PHL}	-	140	500	ns	$R_g = 30\Omega$, $C_g = 3\text{ nF}$, $f = 10\text{kHz}$, Duty Cycle = 50% $I_F = 10\text{mA}$, $V_{CC} = 30\text{V}$	-
Propagation Delay Time to Output High Level	t_{PLH}	-	150	500	ns		-
Pulse Width Distortion	PWD	-	22	200	ns		-
Propagation Delay Difference Between Any Two Parts	PDD ($t_{PHL} - t_{PLH}$)	-200	-	+200	ns		-
Rise Time	t_r	-	50	-	ns		-
Fall Time	t_f	-	50	-	ns		-
Common Mode Transient Immunity at Logic High	CM_H	± 20	-	-	kV/ μs	$I_F = 7\text{ to }16\text{mA}$ $V_{CC} = 30\text{V}$, $T_A = 25^\circ\text{C}$, $V_{CM} = 1\text{kV}$	1,2
Common Mode Transient Immunity at Logic Low	CM_L	± 20	-	-	kV/ μs	$I_F = 0\text{mA}$ $V_{CC} = 30\text{V}$, $T_A = 25^\circ\text{C}$, $V_{CM} = 1\text{kV}$	1,3

All Typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{SS} = 30\text{ V}$, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Pin 2 needs to be connected to LED common.

Note 2: Common mode transient immunity in the high state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in the high state (meaning $V_O > 10.0\text{V}$).

Note 3: Common mode transient immunity in a low state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in a low state (meaning $V_O < 1.0\text{V}$).

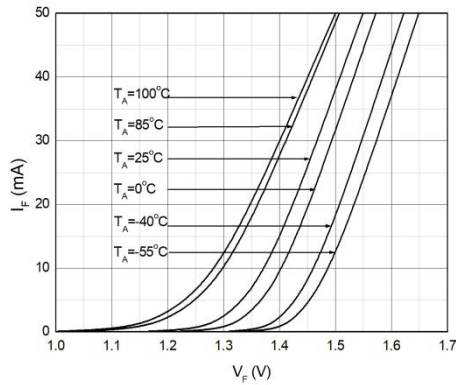
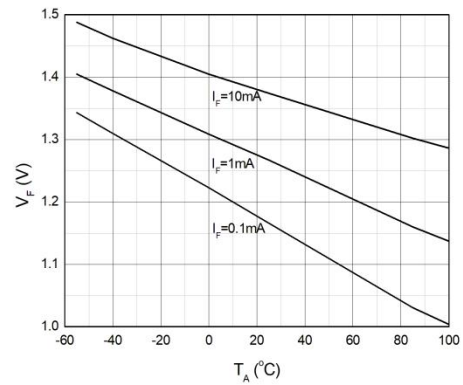
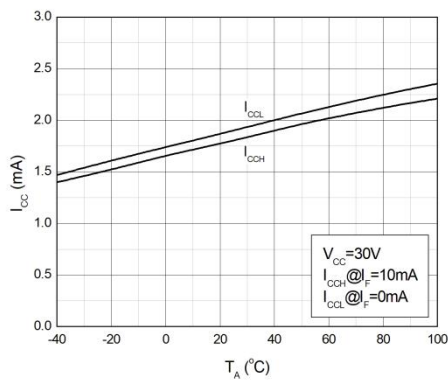
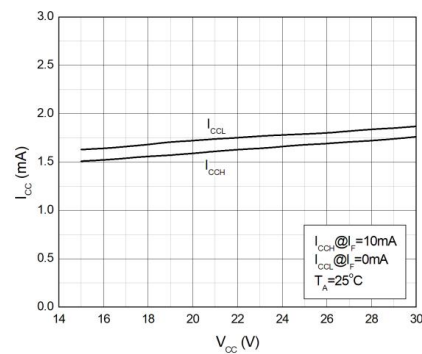
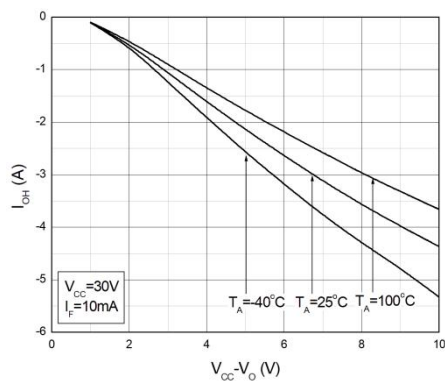
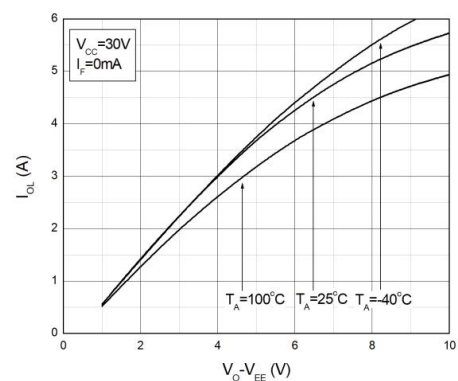
ISOLATION CHARACTERISTIC

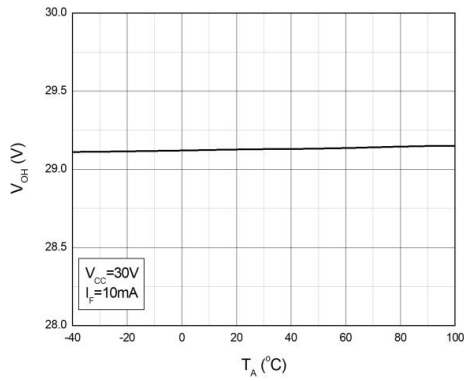
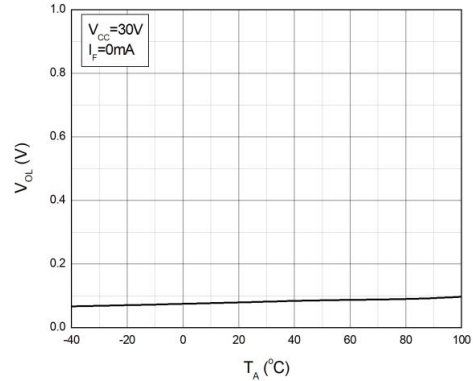
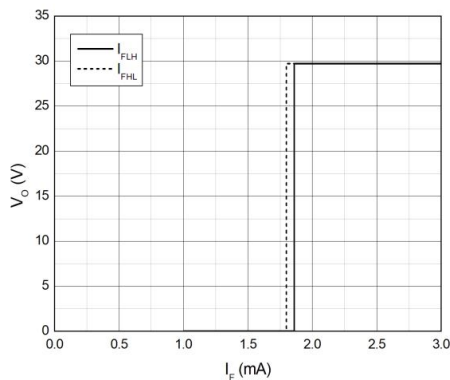
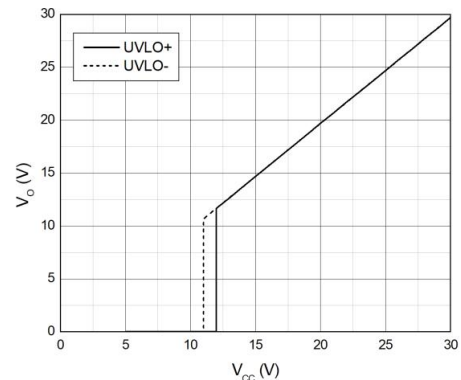
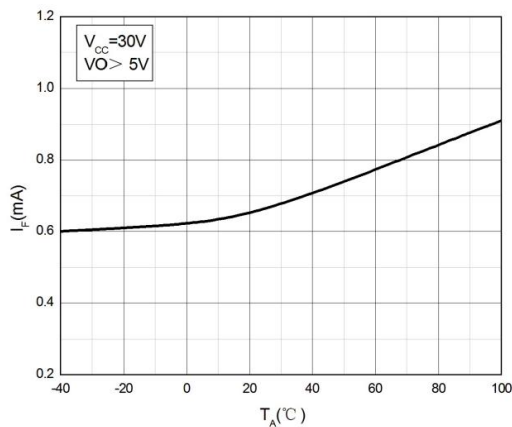
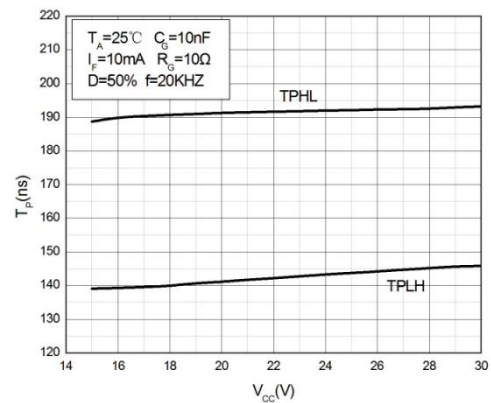
Parameter	Symbo	Device	Min.	Typ.	Max.	Unit	Test Condition	Note
Withstand Insulation Test Voltage	VISO	-	5000	-	-	V	RH ≤ 40%-60%, t = 1min, T _A = 25 °C	1,2
Input-Output Resistance	R _{I-O}	-	-	10 ¹²	-	Ω	V _{I-O} = 500V DC	1

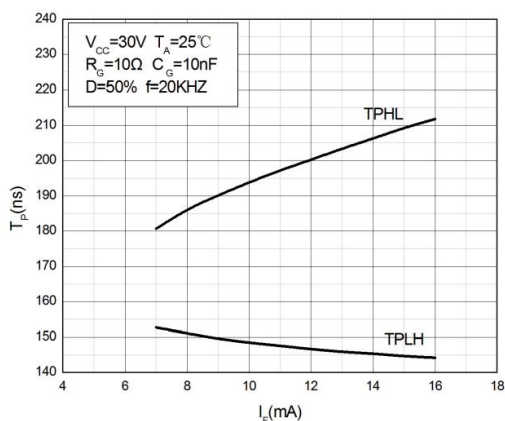
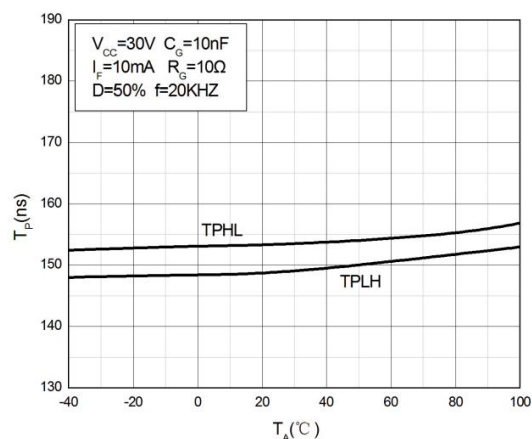
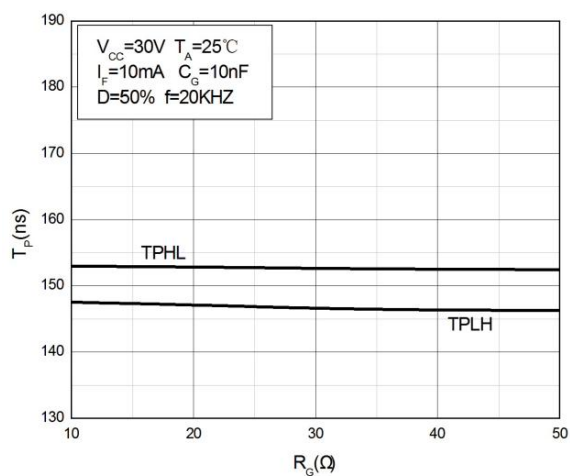
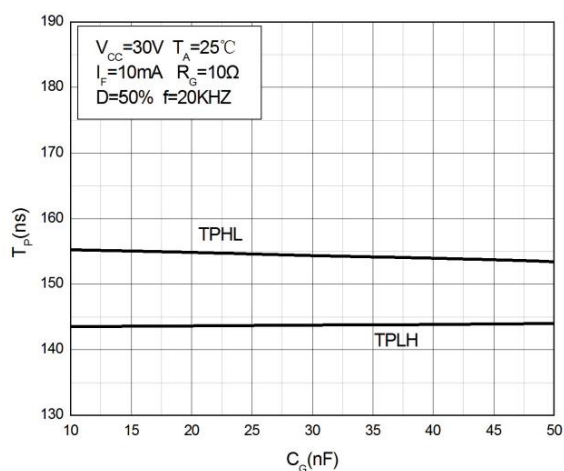
All Typical values at T_A = 25°C and V_{CC} – V_{SS} = 30 V, unless otherwise specified; all minimum and maximum specifications are at recommended operating condition.

Note 1: Device is considered a two terminal device: pins 1, 2, 3 are shorted together and pins 4, 5, 6 are shorted together.

Note 2: According to UL1577, each photocoupler is tested by applying an insulation test voltage 6000VRMS for one second (leakage current less than 10uA). This test is performed before the 100% production test for partial discharge.

CHARACTERISTIC CURVES**Fig.1 Forward Current vs. Forward Voltage****Fig.2 Forward Voltage vs. Ambient Temperature****Fig.3 Supply Current vs. Ambient Temperature****Fig.4 Supply Current vs. Supply Voltage****Fig.5 High Level Output Voltage vs. High Level Output Current****Fig.6 Low Level Output Voltage vs. Low Level Output Current**

CHARACTERISTIC CURVES**Fig.7 High Level Output Voltage
vs. Ambient Temperature****Fig.8 Low Level Output Voltage
vs. Ambient Temperature****Fig.9 Output Voltage
vs. Forward Current****Fig.10 Output Voltage
vs. Supply Voltage****Fig.11 Forward Current
vs. Ambient Temperature****Fig.12 Propagation Delay
vs. Supply Voltage**

CHARACTERISTIC CURVES**Fig.13 Propagation Delay
vs. Forward Current****Fig.14 Propagation Delay
vs. Ambient Temperature****Fig.15 Propagation Delay
vs. Load Resistance****Fig.16 Propagation Delay
vs. Load Capacitance**

TEST CIRCUITS

Fig.17 Test Circuits for IOH

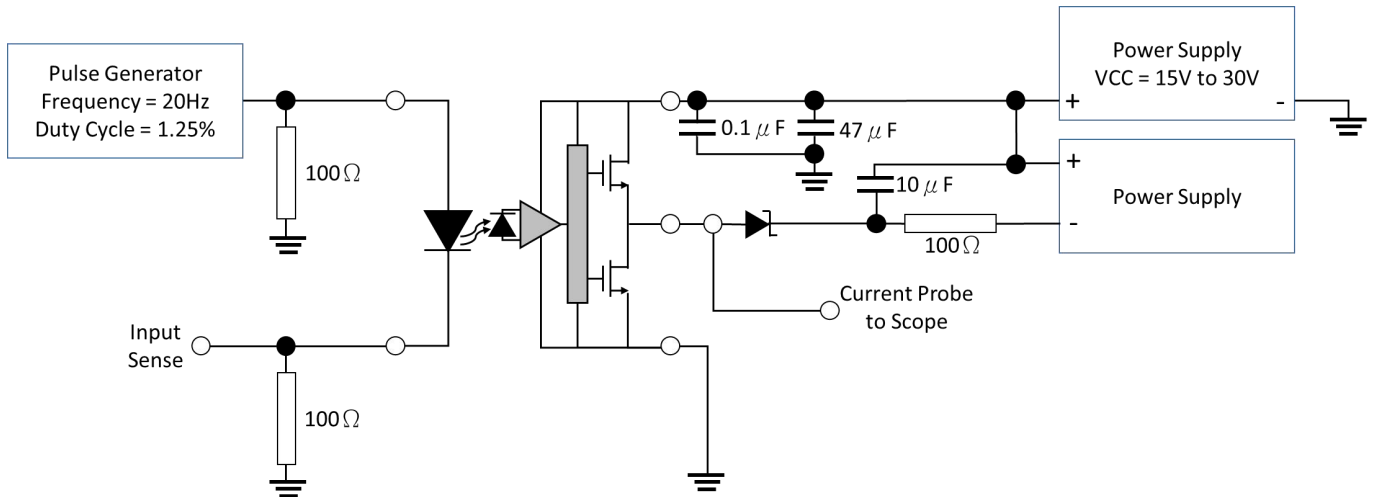


Fig.18 Test Circuits for IOL

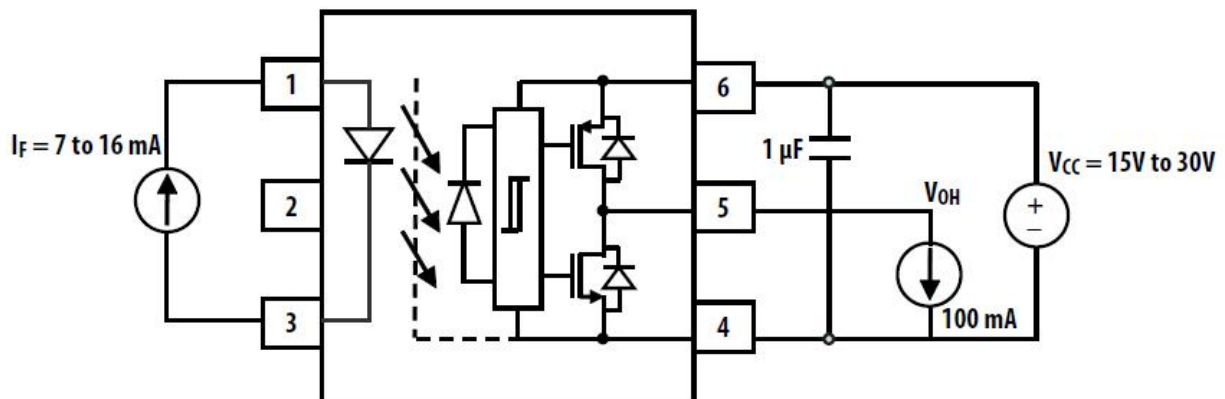
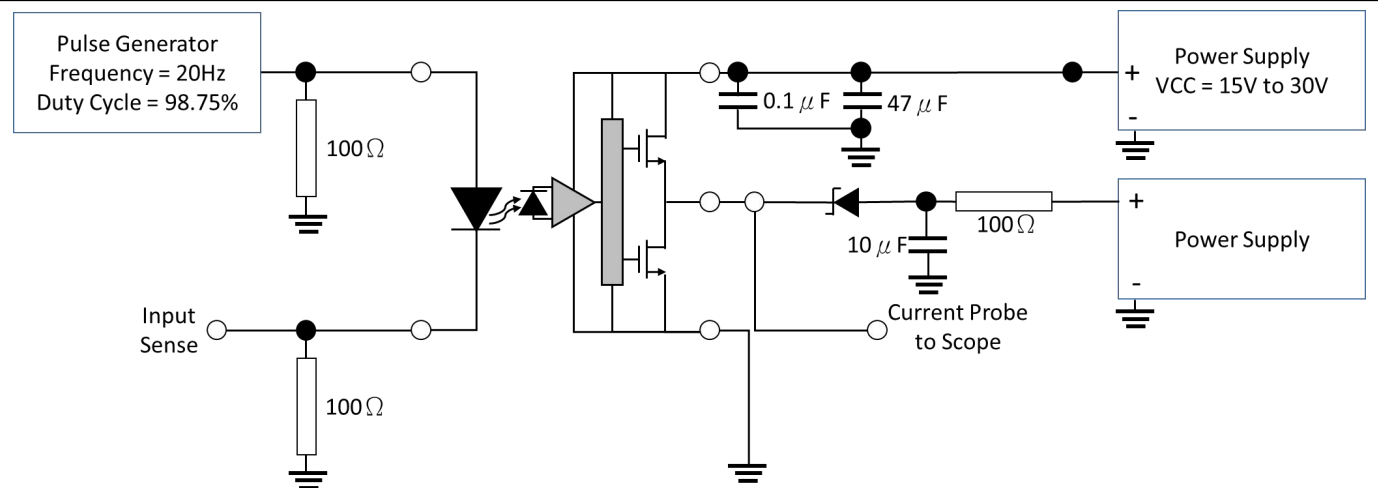


Fig.19 V_{OL} Test Circuit

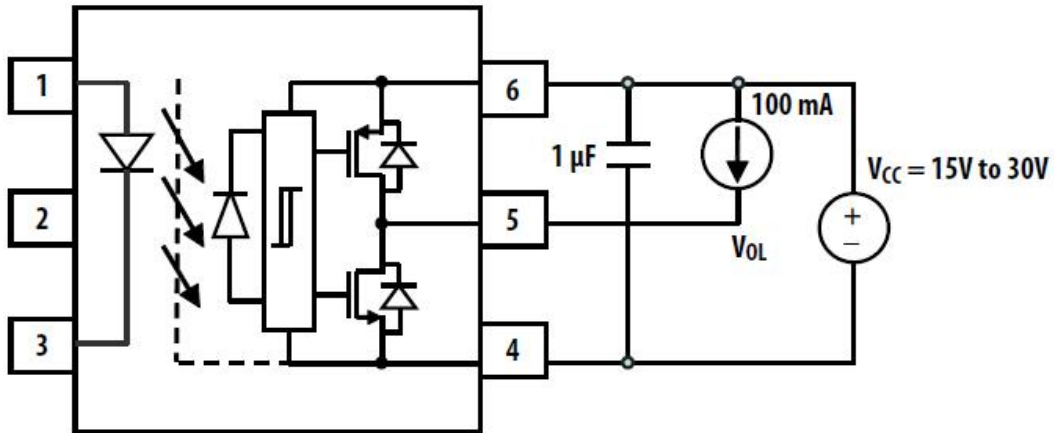


Fig.20 I_{FLH} Test Circuit

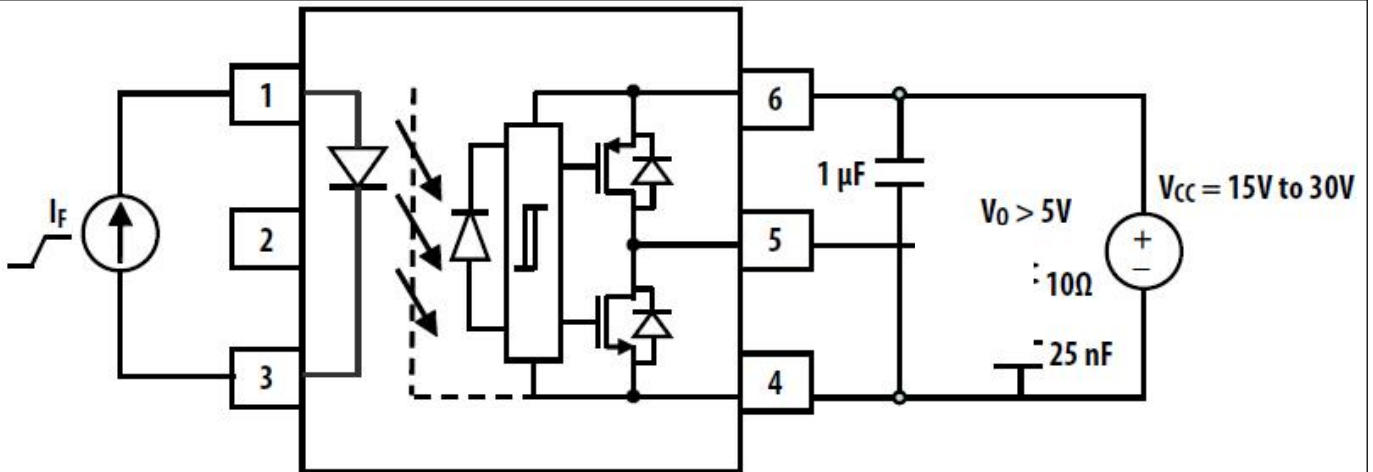


Fig.21 UVLO Test Circuit

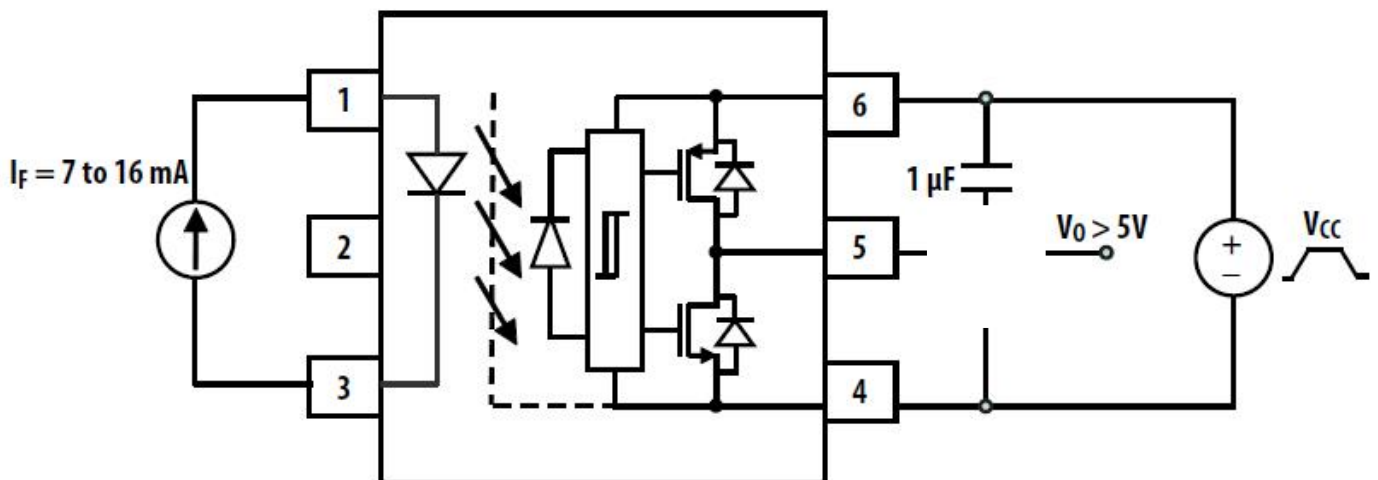


Fig.22 tPHL, tPLH, tr and tf Test Circuit and Waveforms

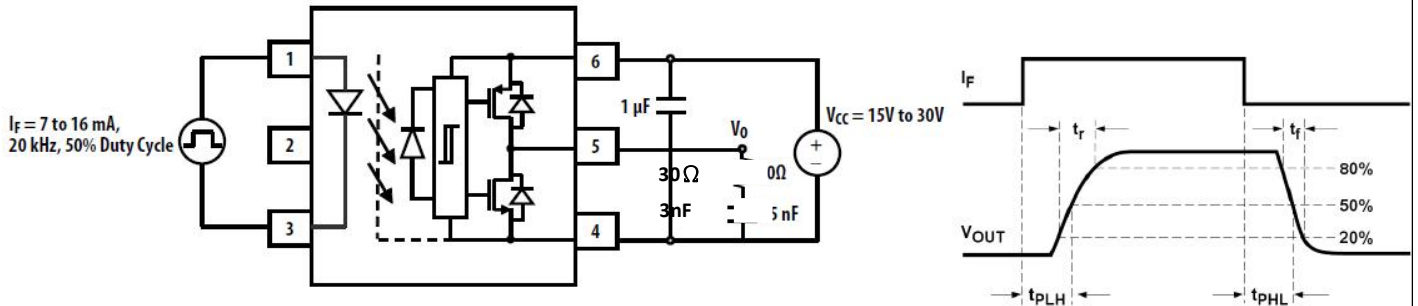
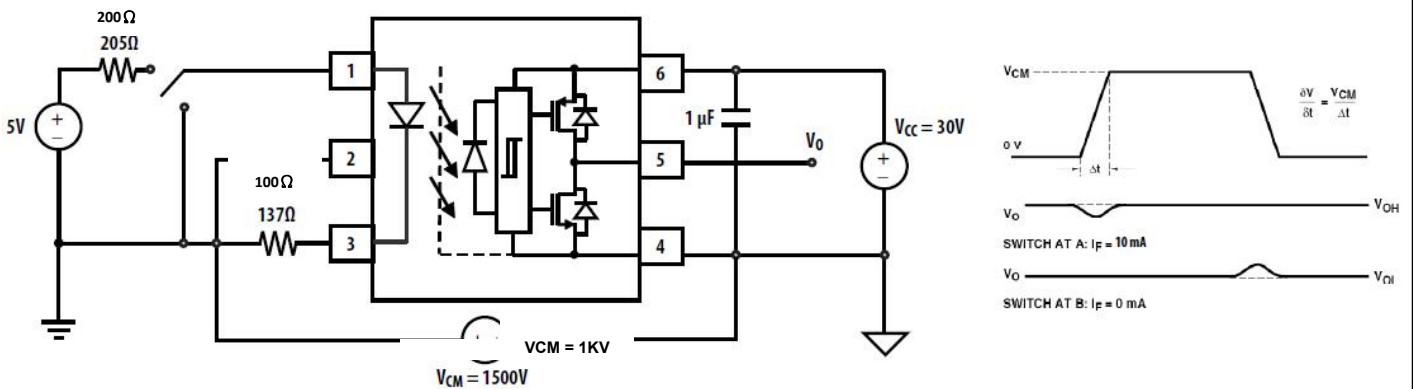
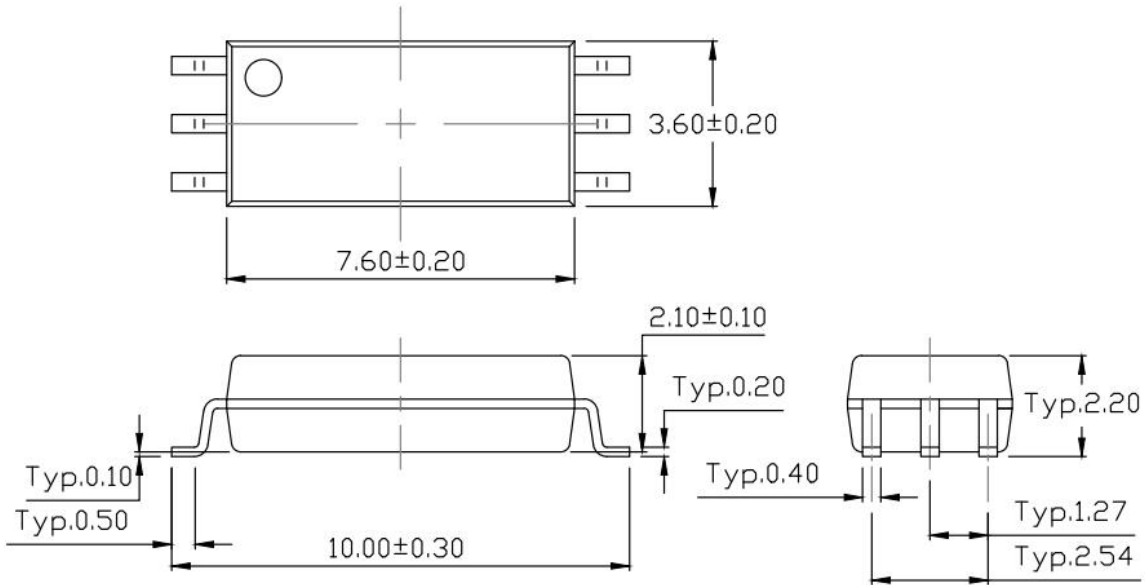
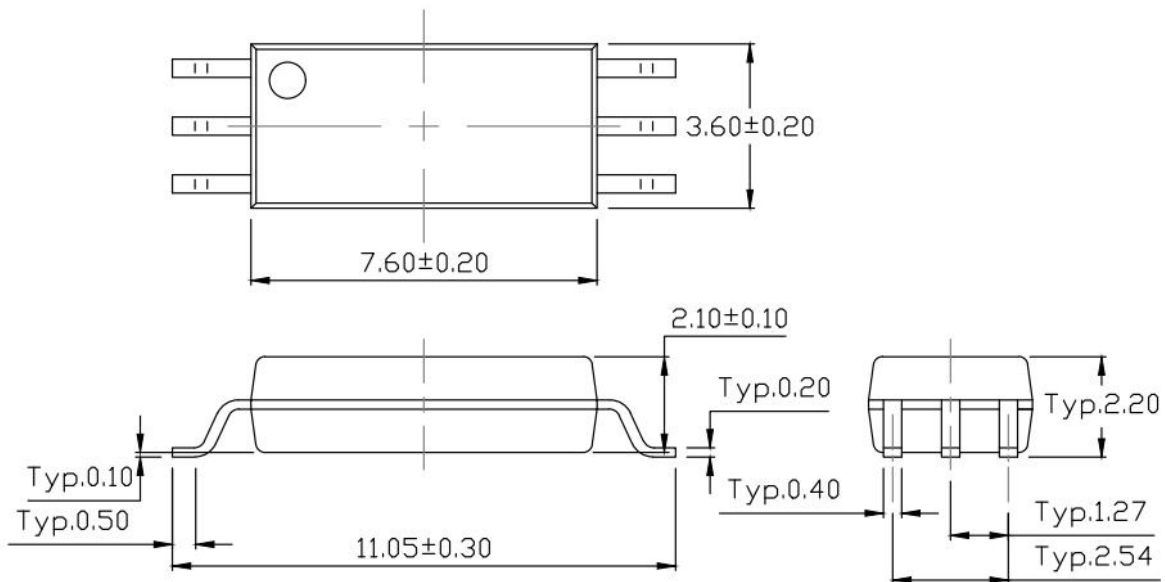
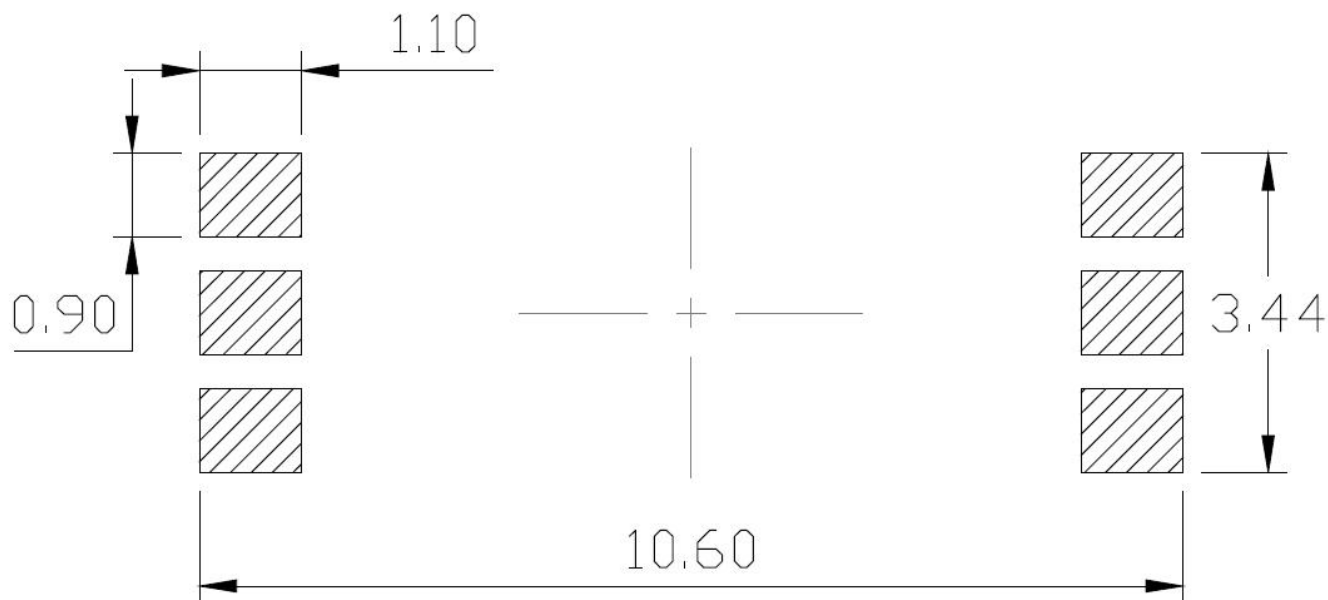
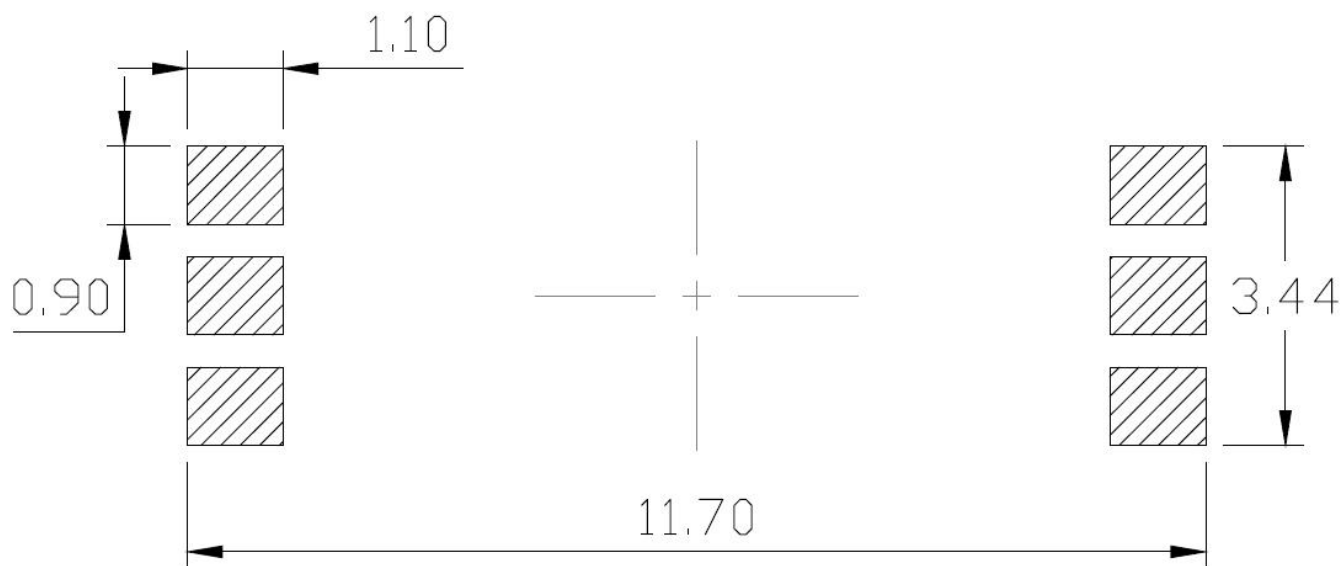


Fig.23 CMR Test Circuit with Split Resistors Network and Waveforms

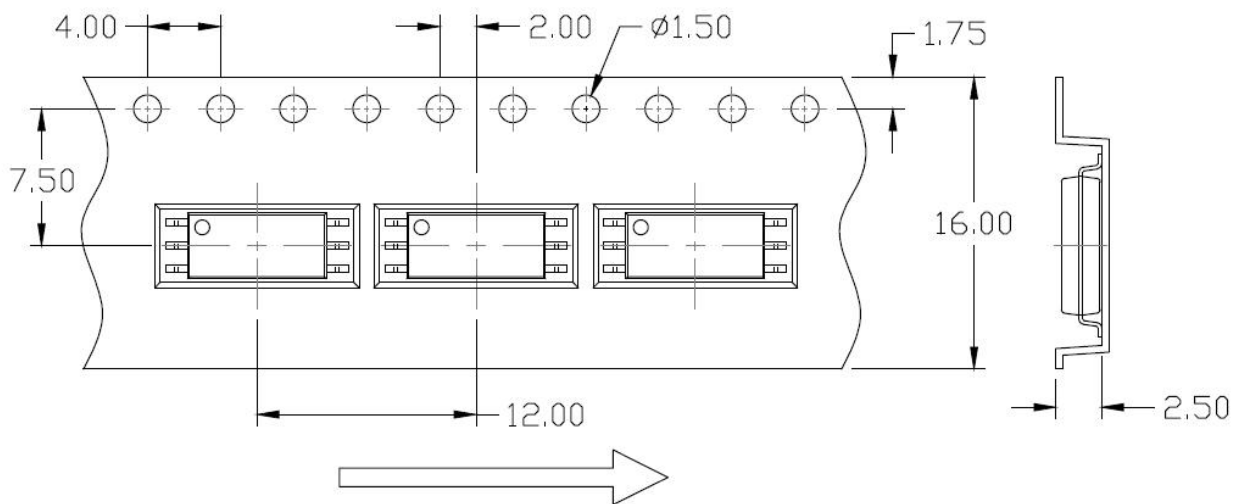


PACKAGE DIMENSIONS (Dimensions in mm unless otherwise stated)**Standard P Type****Standard W Type**

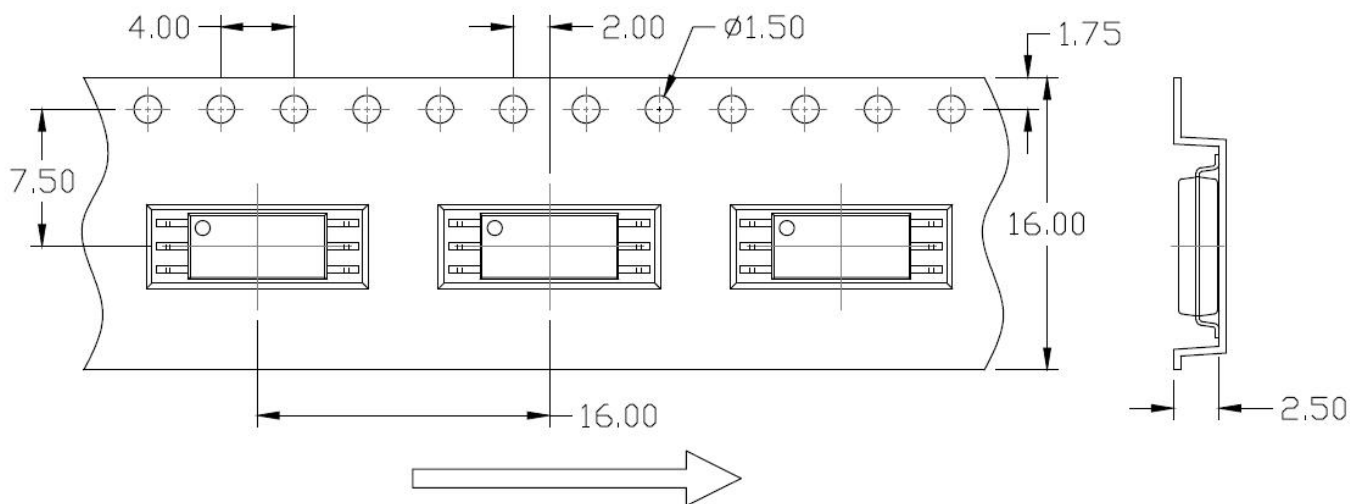
RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)**Standard P Type****Standard W Type**

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard P Type

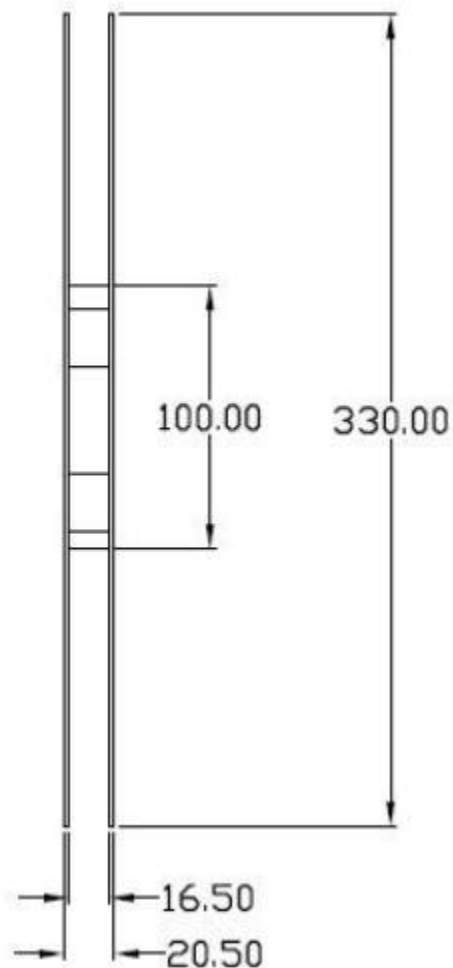


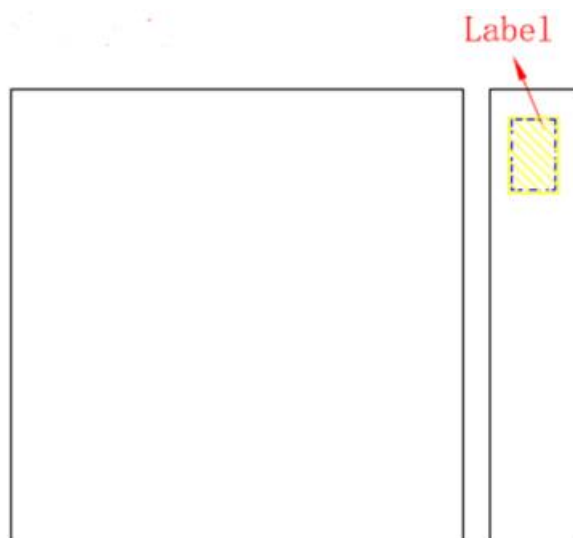
Standard W Type



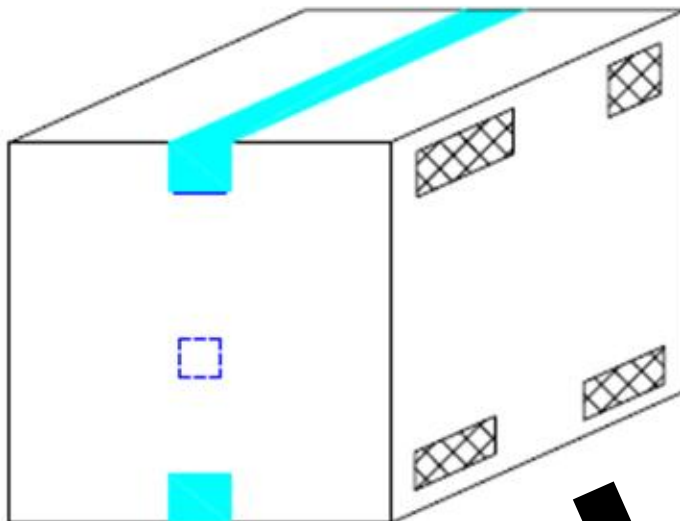
REEL SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option

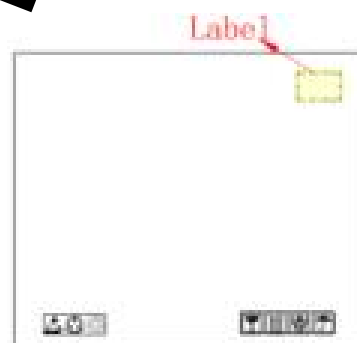


BOX SPECIFICATIONS (Reel Type)**Inner Box**

- L x W x H = 36cm x 36cm x 6.9cm

Outer Box

- Option1: L x W x H = 45cm x 38cm x 38cm
- Option2: L x W x H = 39cm x 38cm x 38cm

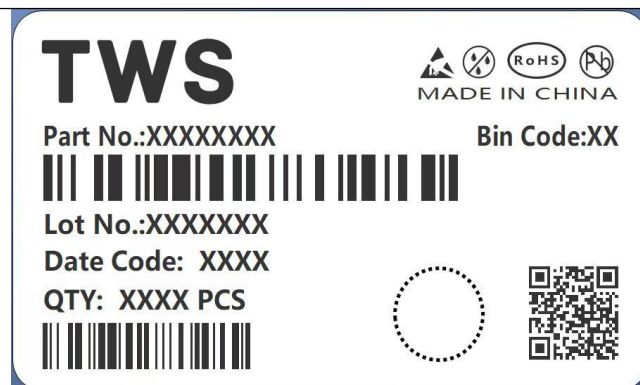


ORDERING AND MARKING INFORMATION**MARKING INFORMATION**

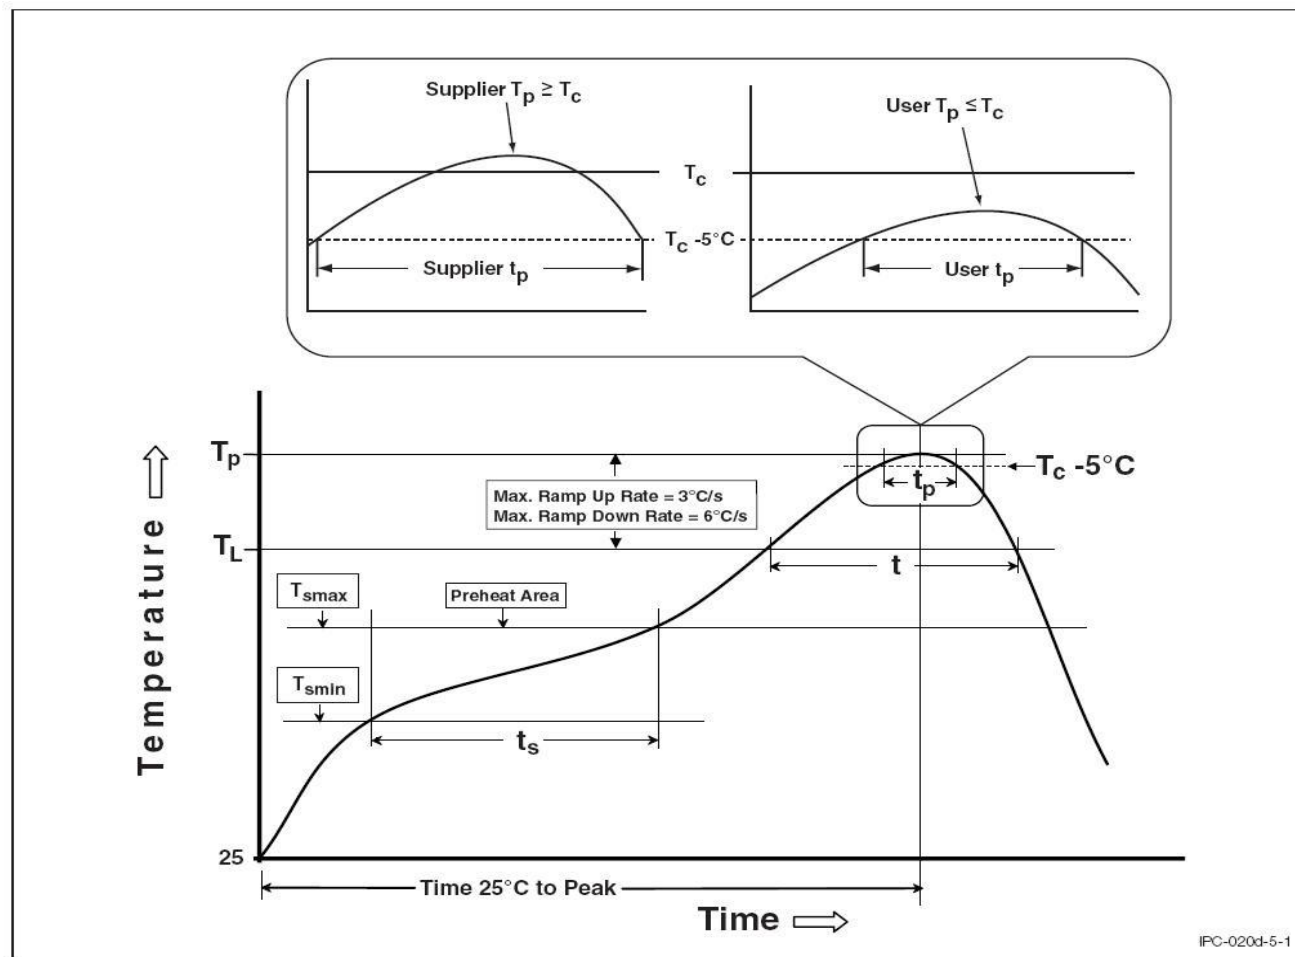
TWS : Company Abbr.
314 : Part Number
Y : Fiscal Year
WW : Work Week

ORDERING INFORMATION**TWSL314(Y)(Z)-G**

TWS – Company Abbr.
 L314 – Part Number
 Y –Lead Form Option (P/W)
 Z – Tape and Reel Option (T1/T2)
 G – Green

LABEL INFORMATION**PACKING QUANTITY**

Option	Quantity	Quantity – Inner box	Quantity – Outer box
T3	1500 Units/Reel	3 Reels/Inner box	5 Inner box/Outer box = 22.5k Units

REFLOW INFORMATION**REFLOW PROFILE**

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile
Temperature Min. (T_{smin})	100	150°C
Temperature Max. (T_{smax})	150	200°C
Time (t_s) from (T_{smin} to T_{smax})	60-120 seconds	60-120 seconds
Ramp-up Rate (t_L to t_P)	3°C/second max.	3°C/second max.
Liquidous Temperature (T_L)	183°C	217°C
Time (t_L) Maintained Above (T_L)	60 – 150 seconds	60 – 150 seconds
Peak Body Package Temperature	235°C +0°C / -5°C	260°C +0°C / -5°C
Time (t_P) within 5°C of 260°C	20 seconds	30 seconds
Ramp-down Rate (T_P to T_L)	6°C/second max	6°C/second max
Time 25°C to Peak Temperature	6 minutes max.	8 minutes max.

DISCLAIMER

- TWS is continually improving the quality, reliability, function and design. TWS reserves the right to make changes without further notices.
- The characteristic curves shown in this datasheet are representing typical performance which are not guaranteed.
- TWS makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, TWS disclaims (a) any and all liability arising out of the application or use of any product, (b) any and all liability, including without limitation special, consequential or incidental damages, and (c) any and all implied warranties, including warranties of fitness for particular
- The products shown in this publication are designed for the general use in electronic applications such as office automation, equipment, communications devices, audio/visual equipment, electrical application and instrumentation purpose, non-infringement and merchantability.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or lifesaving applications or any other application which can result in human injury or death.
- Please contact TWS sales agent for special application request.
- Immerge unit's body in solder paste is not recommended.
- Parameters provided in datasheets may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated in each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify TWS's terms and conditions of purchase, including but not limited to the warranty expressed therein.
- Discoloration might be occurred on the package surface after soldering, reflow or long-time use. It neither impacts the performance nor reliability.